

# KOLLEKTION CHRONUS





WHITE



PERFORATED



NATA



PERFORATED



BEIGE




PERFORATED



LIGHT CAMEL



PERFORATED

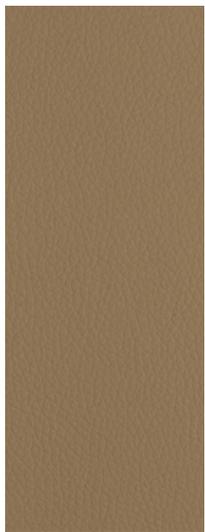

KHAKI



PERFORATED



CAMEL



PERFORATED



DARK CAMEL



PERFORATED



CHOCOLATE



PERFORATED



GREY WHITE



PERFORATED



LIGHT GREY



PERFORATED



GREEN




PERFORATED




DARK BROWN




PERFORATED

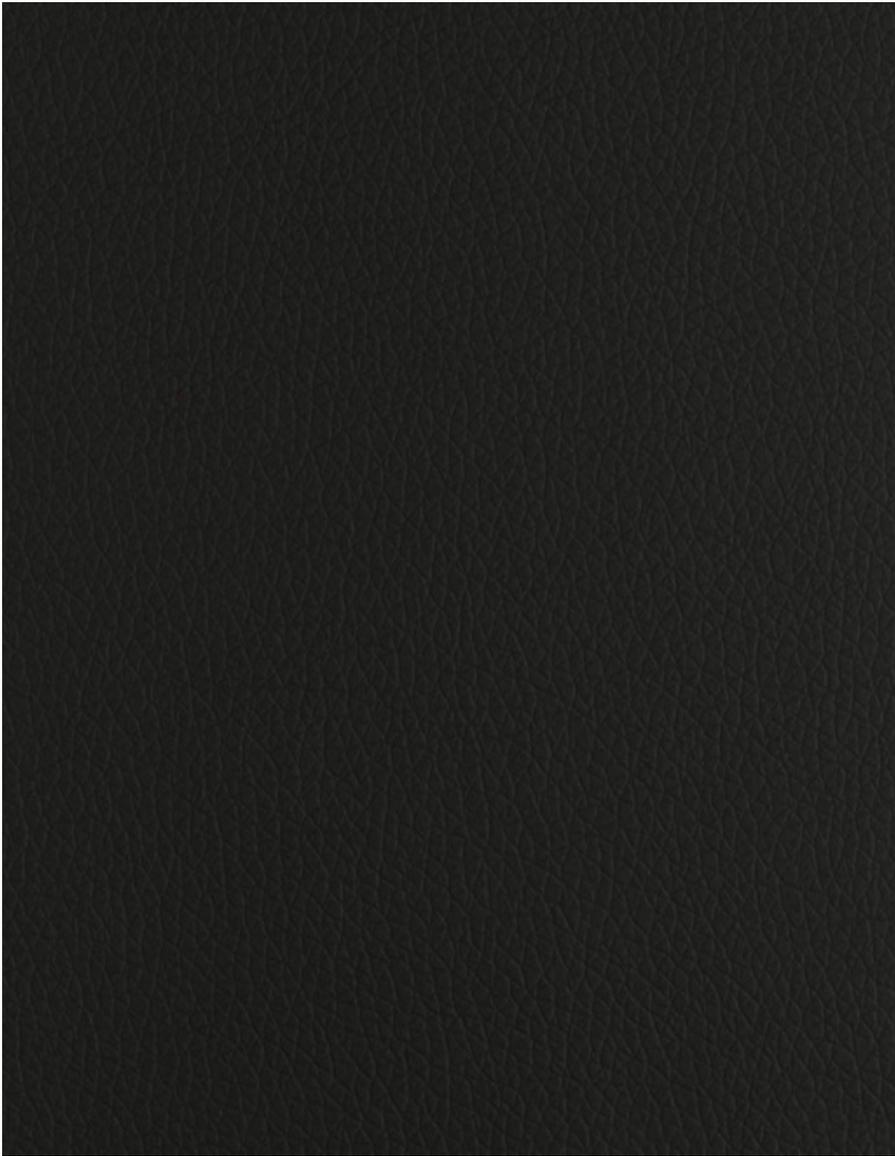

DARK GREY

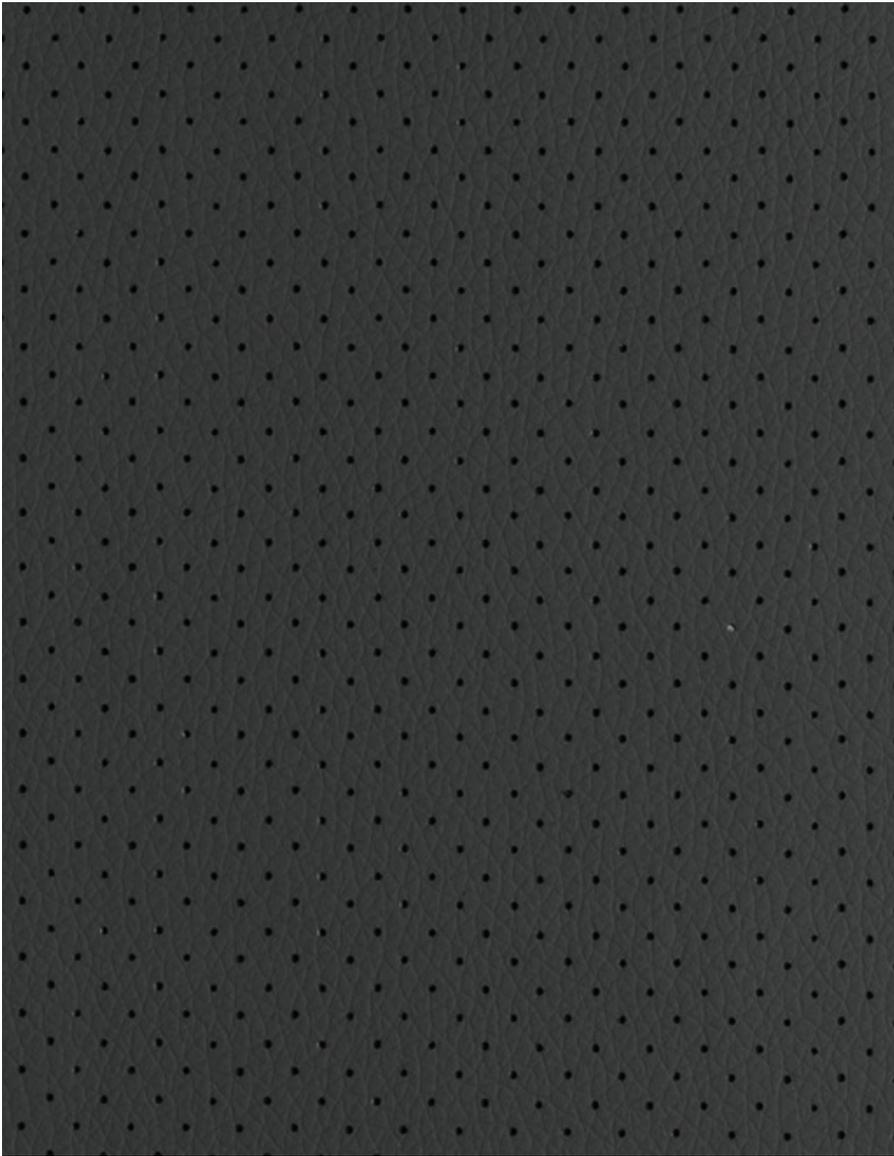

ASH

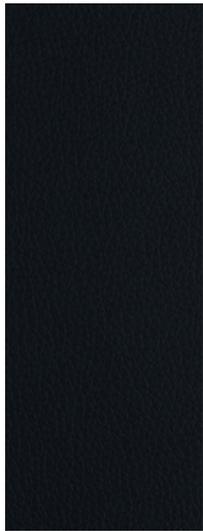

BLUE



PERFORATED



DARK BLACK



PERFORATED



RED



PERFORATED



BORDEAUX



PERFORATED

## TECHNICAL DATASHEET

	TEST PRÜFVERFAHREN PRUEBA	UNIT MASSEINHEIT UNIDAD	GUARANTEED GARANTIERT GARANTIZADA
ROLL WIDTH BREITE ANCHO		140 cm (+/- 2%)	
ROLL LENGTH (AVERAGE) DURCHSCHNITTICHE ROLLENLÄNGE LONGITUD DEL ROLLO (PROMEDIO)		30 m	
COMPOSITION   SURFACE / BASE OBERGEWEBE   UNTERGEWEBE COMPOSICIÓN   TOPO / BASE		100% POLYURETHANE 20% COTTON + 45% POLYESTER + 35% REGENERATED LEATHER	
WEIGHT GEWICHT PESO		945 g/lm (+/- 2%)	
THICKNESS DICKE ESPESOR		1,30 mm (+/- 2%)	
TENSILE STRENGTH   WARP / WEFT ZUGFESTIGKEIT   KETTE / SCHUSS RESISTENCIA A LA TRACCIÓN   URDIMBRE / TRAMA	EN ISO 1421	868 N   16,8% / 601 N   29,8%	
TEAR GROWTH RESISTANCE   WARP / WEFT WEITERREIßFESTIGKEIT   KETTE / SCHUSS RESISTENCIA AL DESGARRO   URDIMBRE / TRAMA	EN ISO 4674-1	151,3 N / 80 N	
SEAM SLIPPAGE RESISTANCE   WARP / WEFT NAHTSCHIEBEFESTIGKEIT   KETTE / SCHUSS RESISTENCIA DE LAS COSTURAS   URDIMBRE / TRAMA	EN ISO 13936-2	2,2 mm / 2,0 mm	
ABRASION TEST SCHEUERBESTÄNDIGKEIT RESISTENCIA A LA ABRASIÓN	EN ISO 5470-2	> 250.000	
PERMANENT CREASING BEHAVIOR (BALLY TEST) DAUERBIEGEFESTIGKEIT RESISTENCIA A LA FLEXIÓN	DIN EN ISO 32100/DIN 53359	100.000 Cycles	PASS
COLOUR FASTNESS TO RUBBING   DRY / WET REIBECHTHEIT   TROCKEN / NASS SOLIDEZ DEL COLOR AL FROTE   SECO / MOJADO	EN ISO 105-X12	5 / 4-5	
COLOUR FASTNESS TO ARTIFICIAL LIGHT LICHTECHTHEIT SOLIDEZ DEL COLOR A LA LUZ ARTIFICIAL	EN ISO 105-B02	5	
FIRE PROOF NORMS BRANDSCHUTZNORMEN NORMAS A PRUEBA DE FUEGO	BS 5852 PART I EN 1021-1 / 2		PASS

